


(12) UK Patent Application (19) GB (11) 2 129 779 A

(21) Application No 8308461  
(22) Date of filing 1 Dec 1980  
Date lodged 28 Mar 1983  
(30) Priority data  
(31) 7941470  
8026500  
(32) 30 Nov 1979  
14 Aug 1980  
(33) United Kingdom (GB)  
(43) Application published  
23 May 1984  
(51) INT CL<sup>3</sup>  
B65D 85/672 25/04 25/10  
(52) Domestic classification  
B8P E1X  
U1S 1804 B8P  
(56) Documents cited  
GB A 2016419  
US 4132311  
US 4009781  
US 3640379  
US 3620361  
(58) Field of search  
B8P  
(60) Derived from Application  
No. 8038501 under  
section 15(4) of the  
Patents Act 1977.


(71) Applicant  
Peter Pendrill,  
7 Lind Close,  
Earley,  
Berkshire.  
(72) Inventor  
Peter Pendrill  
(74) Agent and/or Address for  
Service  
Haseltine Lake & Co.,  
Hazlitt House,  
28 Southampton  
Buildings,  
Chancery Lane,  
London WC2A 1AT.

(54) Cases for recording media

(57) A case for containing a tape cassette comprises a tray 2 with a lid 3, the tray being internally divided by an interrupted wall 6 into a cassette compartment 7 and an extra compartment 8. Undercut ribs 4 and complementary grooves in the lid 3 and the tray 2, respectively, enable the case to be releasably interengaged with other such cases. The extra compartment 8 receives informative or promotional material.

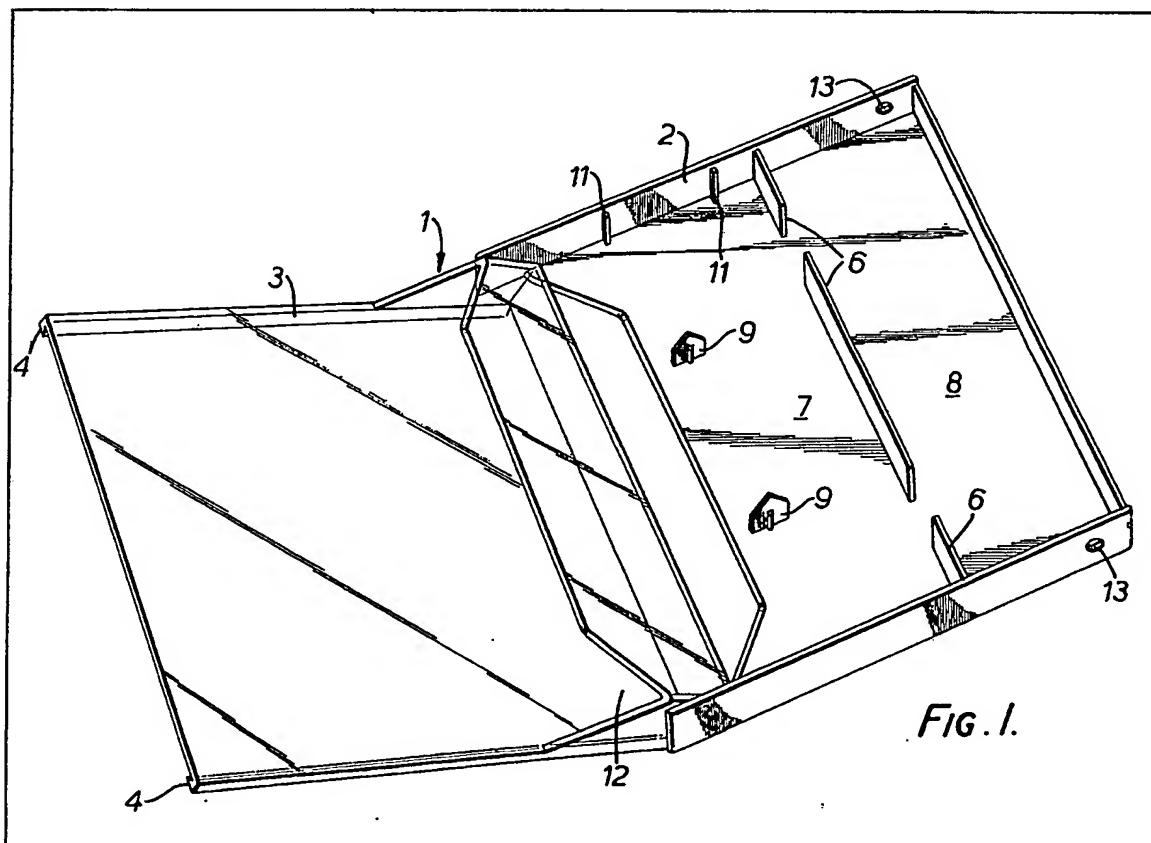

GB 2 129 779 A

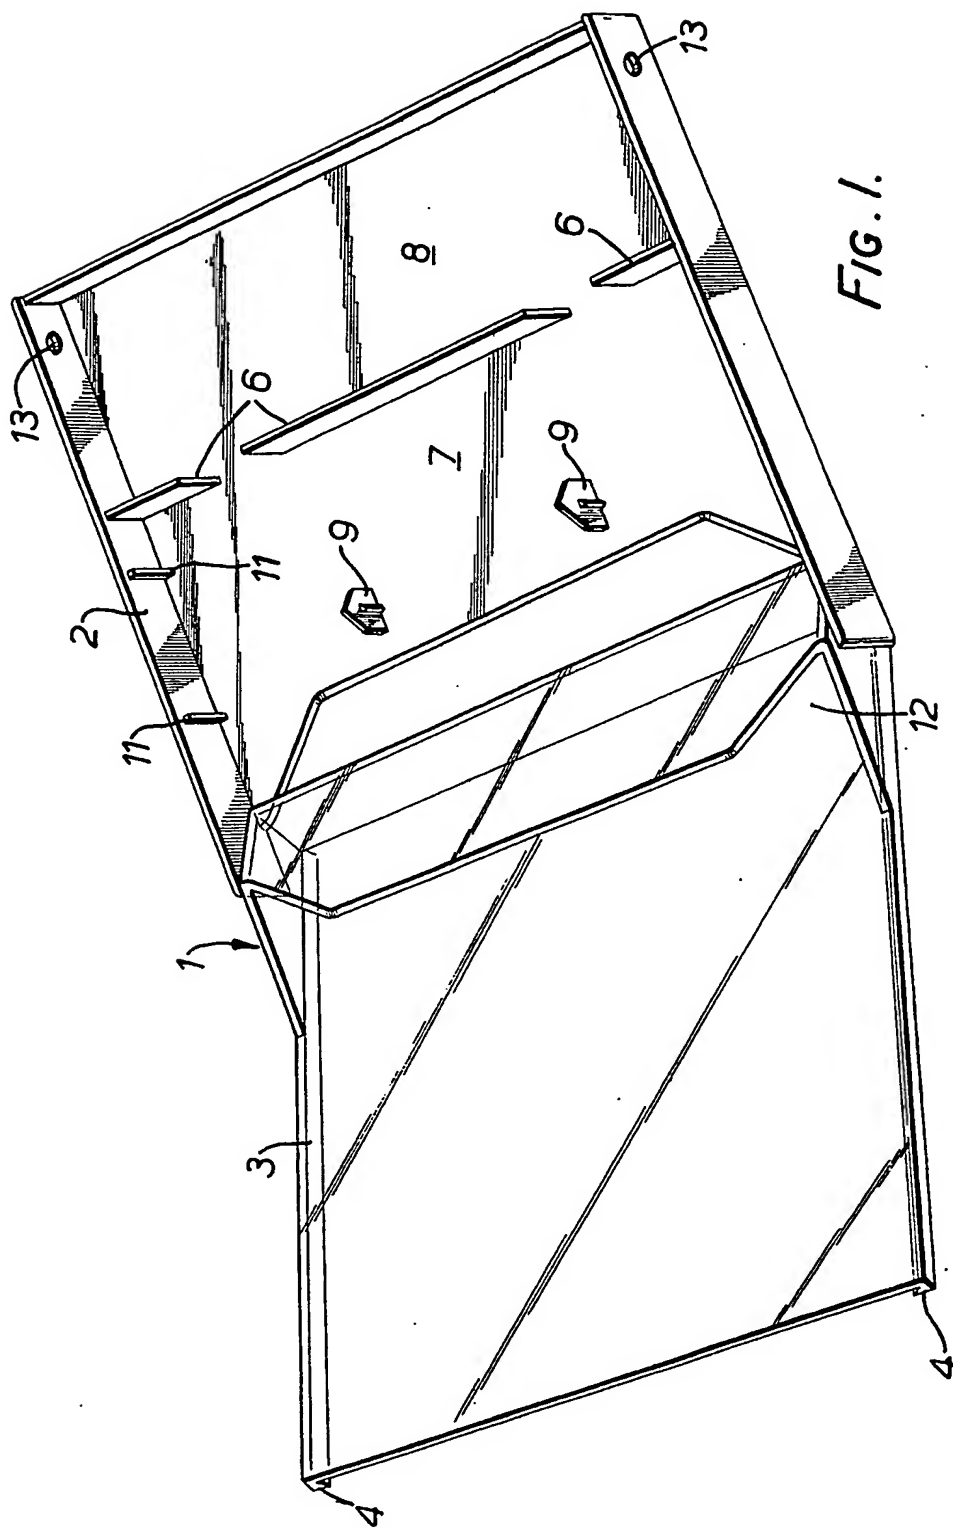

**FIG. 1.**

2/4

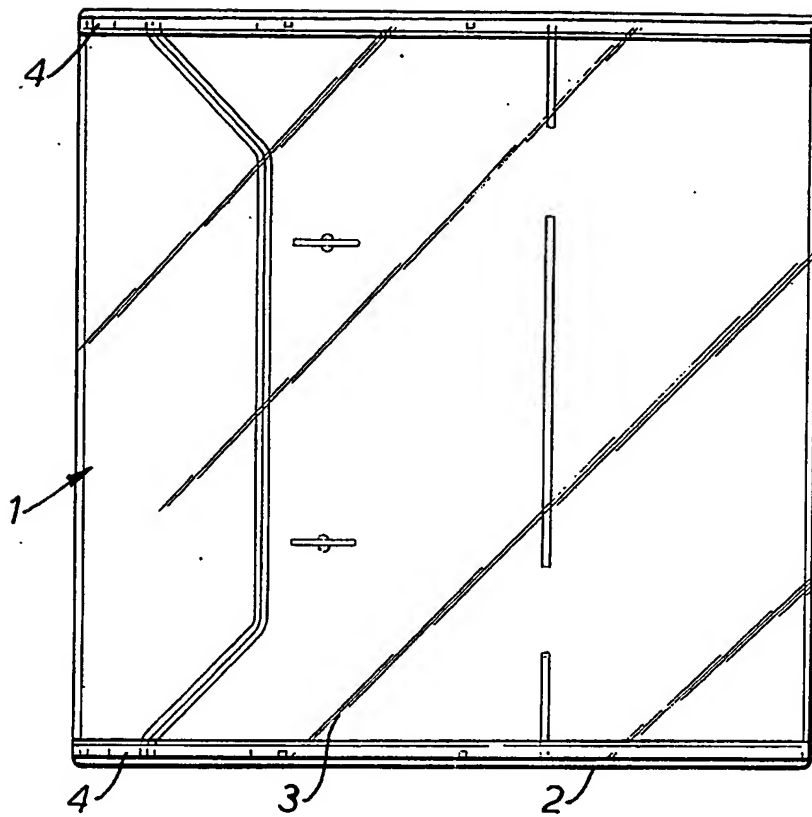


FIG. 2.

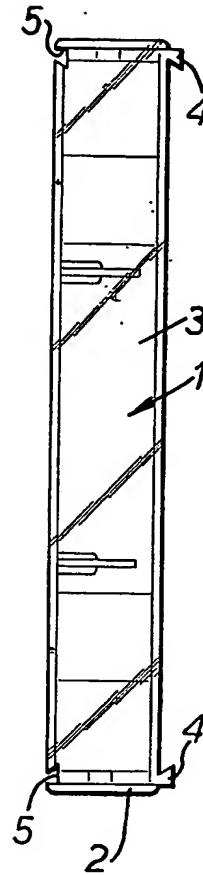


FIG. 3.

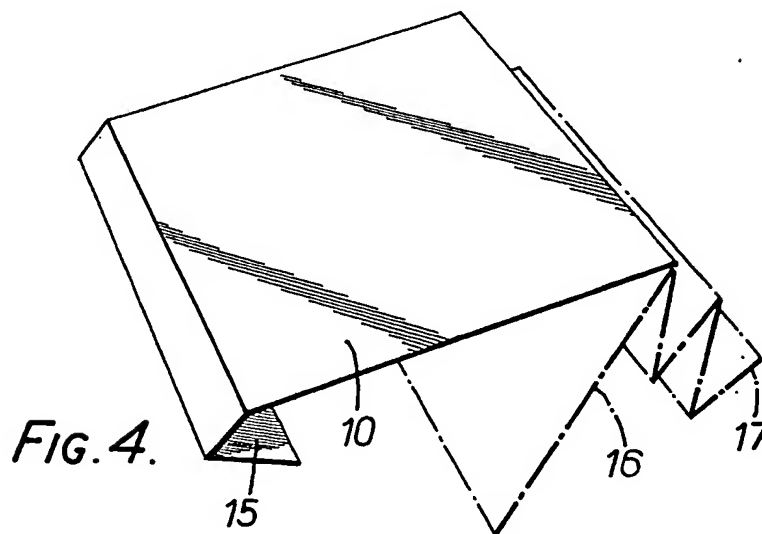


FIG. 4.

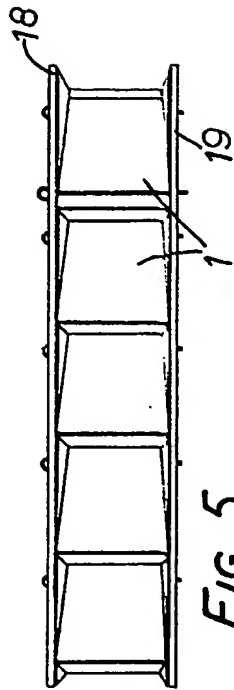


FIG. 5.

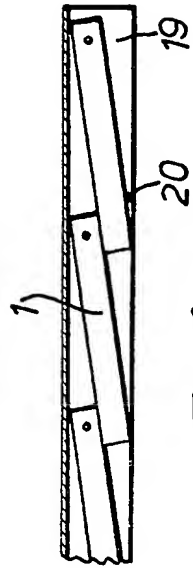


FIG. 6.

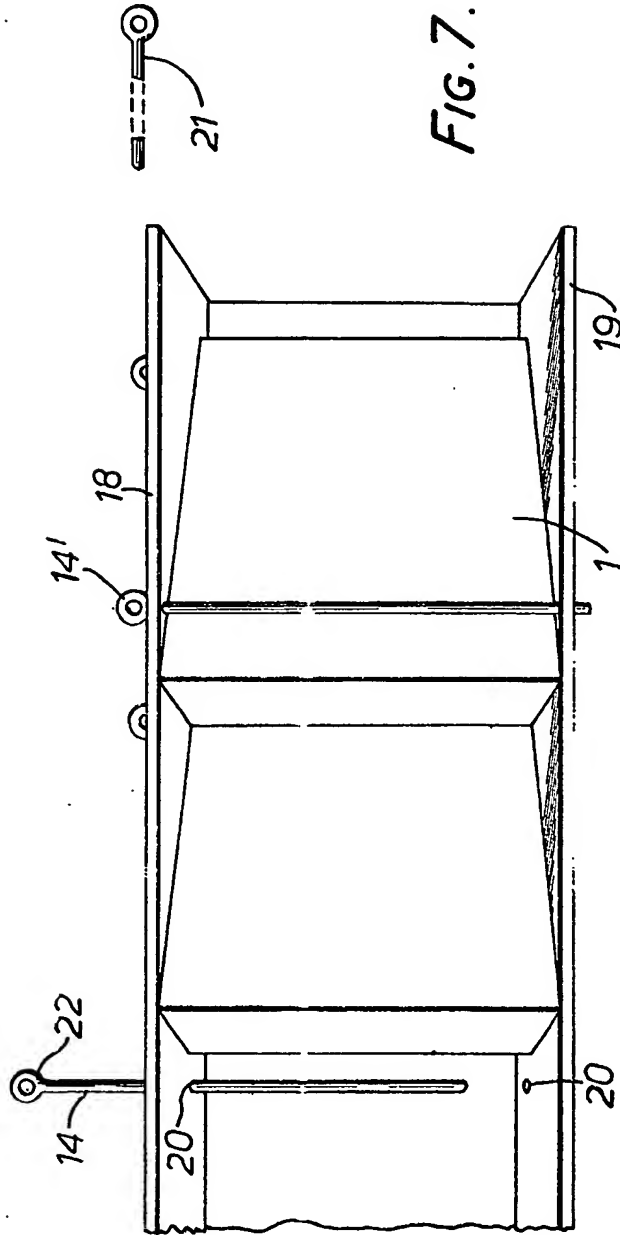


FIG. 7.

4/4

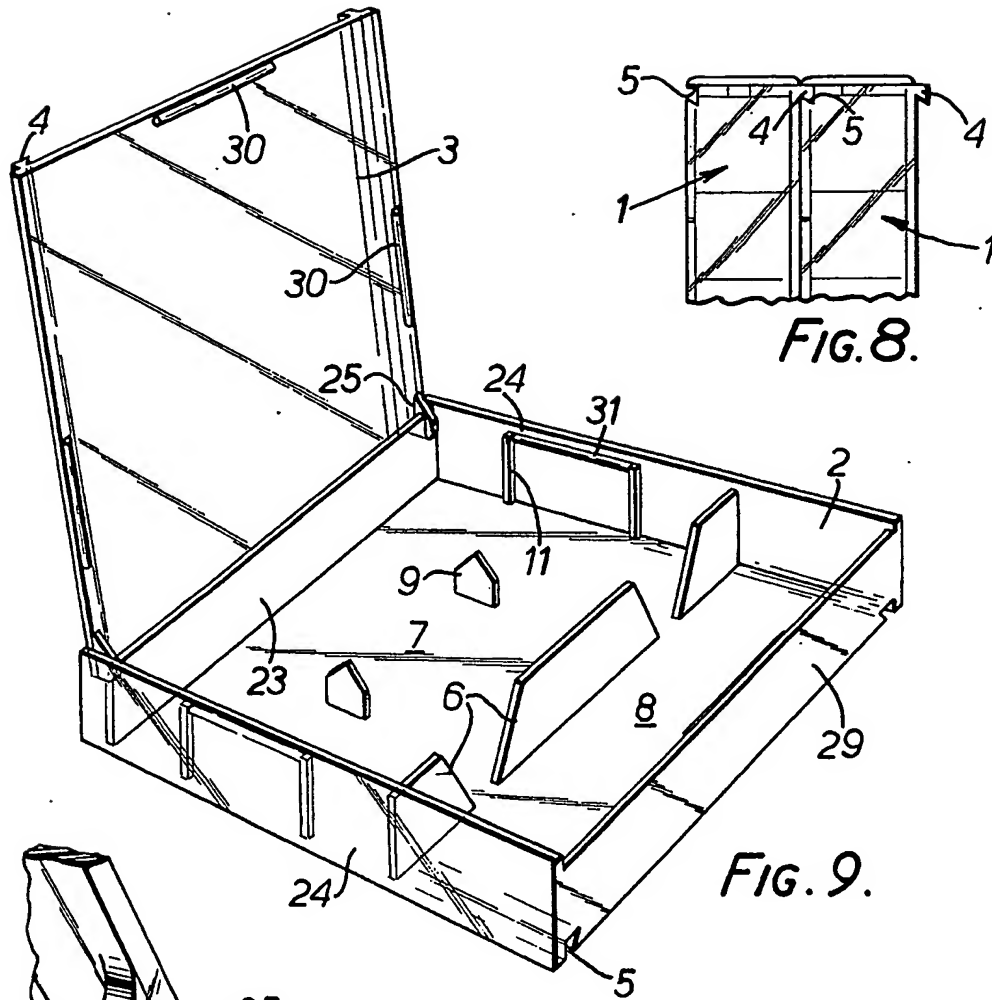


FIG. 8.




FIG. 10.

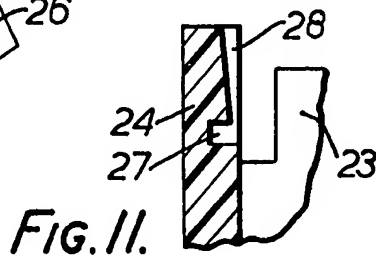


FIG. 11.




FIG. 12.




FIG. 13.

## SPECIFICATION

## Improvements in or relating to cases for recording media

5 According to the present invention, there is provided a case for containing a recording cassette, said case being substantially rectangular, longer than it is thick and wider than it is thick, the length and the width of the case being substantially eleven centimetres, and said case comprising a tray and a lid arranged to close said tray, whereby the interior of said tray comprises a cassette space for receiving said cassette and an extra space side-by-side with said cassette space.

In order that the invention may be clearly understood and readily carried into effect, reference will now be made, by way of example, to the accompanying drawings, in which:-

20 *Figure 1* is a top perspective view of an opened case for containing a tape cassette.  
*Figure 2* shows a top plan view of the case closed,  
*Figure 3* shows an end view of the case closed,  
*Figure 4* shows a top perspective view of an inlay card for insertion in the case,

25 *Figure 5* shows a front elevation of a secure display apparatus displaying a row of cases according to *Figures 1* to *3*,

30 *Figure 6* is a top plan view of the display apparatus, but with a top wall and securing rods thereof removed for the sake of easy understanding,

*Figure 7* is a front elevation of part of the display apparatus,

35 *Figure 8* shows an end elevation of two closed cases interengaged,

*Figure 9* shows a top perspective view of an opened modified version of the case,

*Figure 10* shows a perspective view of a pivot bracket of a lid of the modified version,

40 *Figure 11* shows a complementary pivot mounting of a tray of the modified version,

*Figure 12* shows a vertical section through a side wall of the tray and side edges of the lid and an inlay card of the modified version closed, and

45 *Figure 13* shows a top perspective view of the inlay card for the modified version.

Referring to *Figures 1* to *3*, the case *1* is for containing a standard, twin-pool, tape cassette (not shown) and includes a tray *2* with a lid *3* pivotally mounted at an end of the tray *2*. The case *1* is substantially rectangular, its outside length dimension being 109 mm., its outside width dimension being 109 mm., and its outside thickness dimension being 17 mm.. Along the whole length of the side edges of the lid *3* are laterally undercut ribs *4*. The whole length of the side edges of the underneath surface of the tray *2* are formed undercut grooves *5*, the cross-section of each of which is complementary to the cross-section of each rib *4*. Thus, the ribs *4* of one case *1* can be slid longitudinally along the grooves *5* of another case *1* to interengage the cases, as illustrated in *Figure 8*, so that the cases *1* cannot be pulled apart except in a direction parallel to the ribs *4* and grooves *5*. Cases *1* can therefore be interengaged in a continuous row if so desired. An

interrupted dividing wall *6* divides the tray *2* into a cassette compartment *7* and an extra compartment *8*. The base of the tray *2* in the compartment *7* has formed integrally therewith two vertical securing guides *9* which are so located as to enter the sprocket holes of a tape cassette when the cassette is fitted in the compartment *7*. The wall *6* is situated at 40 mm. from the lid pivoting end of the tray *2* and its functions are to bear against the cassette fitted into the compartment *7* and to separate the compartment *7* from the compartment *8* which can be used to contain marketing and/or promotional aids. The wall *6* also serves to support the inlay card *10* (see *Figure 4*) and the lid *3* when the lid *3* is closed. It is interrupted in two places in order to permit easy extraction of the cassette from the compartment *7* and of any items in the compartment *8*. Short, 1 mm. square section, vertical ribs *11* moulded integrally at the insides of the side walls of the tray *2* in the compartment *7* press against the fitted cassette and help to stop the cassette from rattling in the case *1*. At its end edge nearer its pivot axis, the lid *3* is formed at its inside with a pocket *12* which receives the tape cassette in a conventional way. Extending perpendicularly and co-axially through the side walls of the tray *2* are respective bores *13* for receiving a securing rod *14* (see *Figure 7*).

Referring to *Figure 4*, the inlay card *10* mainly lies face-to-face against the lid *3* which is advantageously of transparent plastics material, but the card *10* is advantageously bent back upon itself at one end as at *15*, in order to seat itself in the pocket *12* and about the cassette in the pocket. The other end of the card *10* may include a planar extension flap *16* folded back flatly upon the remainder of the card *10*, or a concertina-form extension *17* which would be housed in the compartment *8*.

Referring to *Figures 5* to *7*, the display apparatus shown comprises upper and lower horizontal walls *18* and *19* formed with vertically aligned holes *20* for receiving the rods *14*. In mounting the cases *1* securely in the apparatus, the holes *13* are aligned with the holes *20* and the rods *14* are inserted therein. Then the cases *1* are swung about their respective rods *14* into positions in which they contact each other but slightly overlap each other as seen from the front of the apparatus. Then a rod *14'* is inserted vertically into a pair of holes *20* immediately in front of that end case *1* which is not itself overlapped as seen from the front, whereby the other cases *1* are trapped in position. To increase the security of the system, a long rod *21* can be passed horizontally through respective eyes *22* at the upper ends of the rods *14*.

The case shown in *Figures 9* to *12* differs from that shown in *Figures 1* to *3* in a number of respects. The pocket *12* has been completely dispensed with and instead the tray *2* has an end wall *23* near the top edge of which the lid *3* is pivotally mounted in the side walls *24* of the case *2*. At the insides of the corners of the lid *3* nearer the wall *23* are moulded integrally with the lid *3* respective brackets *25* from which respective coaxial horizontal pivot pins *26* project outwardly. These pins *26* are journaled in horizontal co-axial bores *27* formed in the respective

inside surfaces of the walls 24. Also formed in those inside surfaces are vertical channels 28 which extend from the top edges of the side walls 24 to the respective bores 27 and which gradually become shallower progressing towards the bores. Thus the pins 26 can be pushed down the channels 26, the plastics material of the walls 24 and the lid 3 yielding resiliently, until the pins 26 snap outwardly into the bores 27. The pins 26 are moulded integrally with the lid 3 and protrude from the brackets 25 by 2 mm.. The lid 3, when shut, sits on top of the opposite end wall 29 of the case 2 and on top of the wall 6. It is snapped shut by forcing undercut ribs 30 along three edges thereof over smooth moulded ribs 31 along the insides of the respective walls 24 and 29. Not only are the ribs 30 undercut at their outsides to receive the ribs 31, but they are also undercut at their insides to receive an inlay card 32.

Referring to Figure 13, the card 32 comprises planar portions 33, 34 and 35 separated by folds and arranged to lie flatly against the lid 3, the wall 23 and the base of the compartment 7, respectively. The portion 35 is formed with slits 36 for receiving the guides 9. The inlay card 32, particularly on its surface placed against the lid 3, carries pre-printed information.

The case 2 is advantageously made of transparent plastics to give all round visibility to the purchaser. Thus the purchaser can see the information displayed on the inlay card underneath the lid 3 and can also see what is in the compartment 8.

An advantage of the present case is that it improves the sales potential of a pre-recorded tape cassette. In particular, since the portion of the inlay card immediately beneath the lid 3 is square, it can be printed with a direct reduction of the gramophone record sleeve front, this representing an important saving in art work and other charges. Furthermore, the extra compartment 8 gives the recording company the opportunity of incorporating any extra information sheets about the release, of a catalogue of products available, or redemption slips for merchandising, or, with straight-forward reduction from a gramophone record insert or liner bag, the complete album lyrics. This, combined with the relatively large area available for printing on the inlay card, means that all, or nearly all, information can be reproduced from an album, including the complete sleeve back. However, unlike the album, the present case allows the inclusion in the compartment 8 of promotional sales aids, such as badges or tape cleaning equipment.

#### CLAIMS

1. A case for containing a recording cassette, said case being substantially rectangular, longer than it is thick and wider than it is thick, the length and the width of the case being substantially eleven centimetres, and said case comprising a tray and a lid arranged to close said tray, whereby the interior of said tray comprises a cassette space for receiving said cassette and an extra space side-by-side with said cassette space.

2. A case as claimed in Claim 1, wherein each of

said length and said width is 109 millimetres.

3. A case as claimed in Claim 1 or 2, wherein said tray is divided internally by a dividing wall into said cassette space and said extra space.

4. A case as claimed in Claim 3, wherein said dividing wall is interrupted at a location along its length.

5. A case as claimed in any preceding claim, and further comprising first and second bores extending co-axially through respective opposite side walls of said tray at said extra space for slidably receiving an elongate securing member.

6. A case as claimed in any preceding claim, wherein each of the top surface of said lid and the underneath surface of said tray is formed with engaging portions shaped to interengage with complementary engaging portions of another such case.

7. A case as claimed in Claim 6, wherein the engaging portions on said lid comprise an undercut rib or an undercut groove and the engaging portions on said tray comprise an undercut groove or an undercut rib.

8. A case as claimed in Claim 6, wherein the engaging portions on said lid comprise first and second undercut ribs or grooves extending along respective opposite edges of said top surface and the engaging portions on said tray comprise third and fourth undercut ribs or grooves extending along respective opposite edges of said underneath surface.

9. A case as claimed in any preceding claim, and containing an inlay card part of which extends over the inside surface of said lid, which is transparent, said card being positioned by a cassette in said case.

10. A case as claimed in Claim 9, wherein said part of said card has at its edge thereof nearest to said extra space a concertina-form extension for housing in said extra space.

11. A case as claimed in any preceding claim, wherein said lid is pivotally mounted in respective opposite side walls of said tray near the top edge of an end wall of the tray, said lid being provided with co-axial pivots which are journaled in respective co-axial bores formed in the respective inside surfaces of said respective opposite side walls of said tray.

12. A case as claimed in Claim 11, and further comprising in said respective inside surfaces of said opposite side walls of said tray, respective substantially vertical channels which extend from the top edges of said respective opposite side walls to the respective bores and which gradually become shallower progressing towards the bores, whereby said pivots can be pushed down said channels, said opposite side walls and/or said lid yielding resiliently, until the pivots snap outwardly into said bores.

13. A case as claimed in any preceding claim, wherein said lid is arranged to be snapped shut by forcing a ridge, extending along an edge of the inside surface of said lid and undercut at its outside, over a relatively smooth ridge extending along a corresponding edge of one of the upright walls of said tray.

14. A case as claimed in Claim 13 as appended to Claim 9, wherein not only is said ridge undercut at its

outside, but also at its inside to receive an edge of said card.

15. A case as claimed in Claim 3 or 4, or any one of Claims 5 to 14 as appended to Claim 3, wherein, when shut, said lid sits on top of said dividing wall.

16. A case as claimed in Claim 9 or 10, said inlay card being formed with apertures for receiving cassette guides of said case for positioning said card.

- 10 17. A case for containing a recording cassette, substantially as hereinbefore described with reference to Figures 1 to 3, or 9 to 12, of the accompanying drawings.

---

Printed for Her Majesty's Stationery Office, by Croydon Printing Company Limited, Croydon, Surrey, 1984.  
Published by The Patent Office, 25 Southampton Buildings, London, WC2A 1AY, from which copies may be obtained.